

silco[®]

3300 Lubriten

HSM adhesive lubricant

Excellent penetration and adhesive properties
for longterm lubrication.

Usage:



Chains



Gear mechanisms



O-ring seals

www.silco.si



3300 Lubriten

HSM adhesive lubricant

Product info

Remains effective and can penetrate into extremely narrow spots. By sticking to desired places it minimises the possibility for wear&tear.


- / Excellent penetration properties,
- / great lubrication in tight spaces,
- / longterm presence,
- / allows moving parts with less friction,
- / allows moving parts under heavy pressure,
- / high temperature resistance from -40°C to $+200^{\circ}\text{C}$.

How to use?

Apply Lubriten lubricant on required spots. Due to excellent penetration properties, it sticks to the surface and remains active regardless of the applied high pressures.

Usage possibilities: chains, bearings, gear mechanisms, O-ring seals and all sorts of joints, clutches, wire cables.

For further and updated information please refer to the TDS published on www.silco.si.

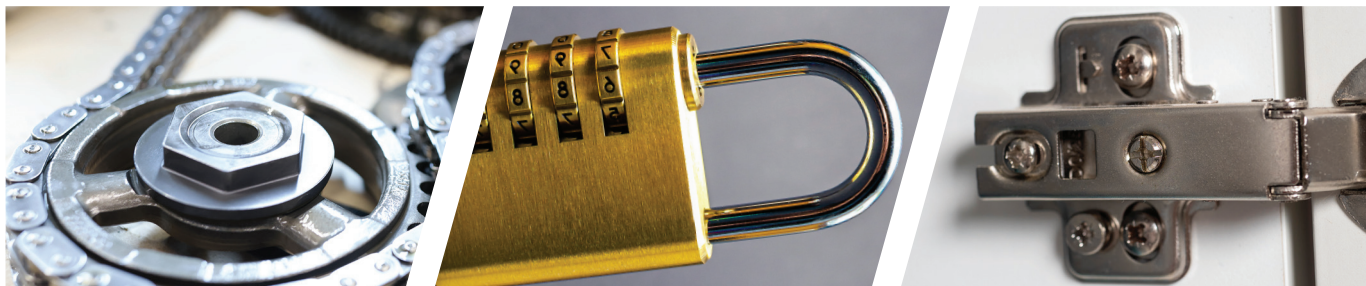

Packaging

3300 Lubriten
HSM adhesive lubricant

Prod. Nr.	Content
3300-0,4	400 ml

Nozzle:

